

DISTRIBUTION SOLUTIONS

SafeRing/SafePlus Air

SF6-free gas-insulated switchgear for secondary distribution



Product scope

- Rated voltage up to 24kV
- Rated current up to 630A
- Rated short-time withstand current up to 21kA / 3s
- Internal Arc Classified IAC AFLR 20kA / 1s
- High duty circuit breakers with M2 (10000 operations) mechanical endurance
- Indoor and outdoor applications

SafeRing Air ring main unit (RMU) and SafePlus Air switchgear, with dry air as the insulation medium, have a global warming potential (GWP) <1 and are fully compliant with IEC standards and the EU F-gas regulation (EU) 2024/573.

With the introduction of dry air insulation, ABB designed an optimized puffer-type load break switch (LBS) for applications that interrupts load currents (630 A) in dry air in a reliable manner. The new platform has excellent interruption performance of load currents with no additional disconnecter needed.

The sulfur hexafluoride (SF₆)-free platform is designed with the same interface, footprint, and operations as the original SafeRing/SafePlus portfolio. The standard SafeRing Air RMU, suitable for most 6kV to 24kV switching applications, is available in various configurations, typically including up to 4 modules. SafePlus Air is a compact, metal-enclosed switchgear system for distribution applications up to 24kV. It features a flexible, modular or semi-modular design for easy system expansion, higher ratings, and compatibility with a broader range of protective relays.

SafeRing/SafePlus Air are internal arc classified, IAC AFLR up to 20kA / 1 sec., assuring safe operations when standing in front of the switchgear.

SafeRing/SafePlus Air

Customer benefits

01

Compliant with IEC standards and F-gas regulation

- SF6-free, with dry air as the insulation medium, GWP of < 1, and compliant with the EU F-gas regulation (EU) 2024/573.
- Able to operate in harsh environmental conditions, including altitudes exceeding 1500 m above sea level.

02

Compact, reliable and flexible

- Very low maintenance required as all high voltage parts are permanently sealed in a gas tank and protected from soiling, humidity, entry of foreign bodies and other environmental influences. The platform is compliant with the latest IEC standards for sealed pressure systems.
- All panel variants can remain in service up to the point of repair, even in the unlikely event of a leak.
- Compact design with small footprint and high mechanical endurance up to 10000 operations.
- Outfitted with traditional transformers or sensor technology for current and voltage measurement.
- Advanced automation and control with the IEC 61850 communication protocol.
- Clean production processes and high recyclability at end-of-life.

03

Safety

- Internal arc certified design offers high level of operator safety with front, rear and lateral arc protection, certified with accessibility AFLR 20kA / 1s according to IEC 62271-200.
- Active internal arc protection with an arc suppressor device enhancing safety for operators by rapidly detecting and eliminating internal arcs is available as an additional safety option.
- Same operations as classic SF6 versions with no additional training required.
- Modified gas enclosure design to withstand higher filling pressure.
- Top busbar and side connection up to 630A.
- Wide range of monitoring and diagnostic features for safe and reliable operations.
- Downstream earthing switch ensures that the section of the circuit being worked on is completely de-energized, reducing the risk of electrical accidents, allowing safe operations and maintenance.



RMU/Switchgear Technical Data		C-Module		F-Module		V-Module	
		Switch disconnecter	Earthing Switch	Switch-Fuse Combination	Earthing Switch	Vacuum circuit-breaker	Earthing Switch
Rated Voltage	kV	12/17,5/24	12/17,5/24	12/17,5/24	12/17,5/24	12/17,5/24	12/17,5/24
Power frequency withstand voltage	kV	28/38/50	28/38/50	28/38/50	28/38/50	28/38/50	
Impulse withstand voltage	kV	75/95/125	75/95/125	75/95/125	75/95/125	75/95/125	75/95/125
Rated normal current	A	630		200		200/630	
Short circuit breaking current	kA					25/20/20	
Making capacity	kA	62,5/52,5/52,5	62,5/50/50	Limited by high-voltage fuse-links	6.3	62,5/50/50	62,5/50/50
Short time withstand current (3s)	kA	21(*)/21/21	21(*)/21/21	21(*)/21/21	2.5 (1s)	25/20/20	25/20/20
Number of mechanical operations		1000 close / open manual	1000 close / open manual	1000 close / open manual	1000 close / open manual	10000 close / open manual	2000 close / open manual
Electrical and mechanical classes		E3, C2, M1	E2, M0	E3, M1	E2, M0	E2, C2, S1, M2 for operating sequence O-0.3s-CO- 15s-CO	E1, M1

* 25kA will be released in subsequent release.

SafePlus Air

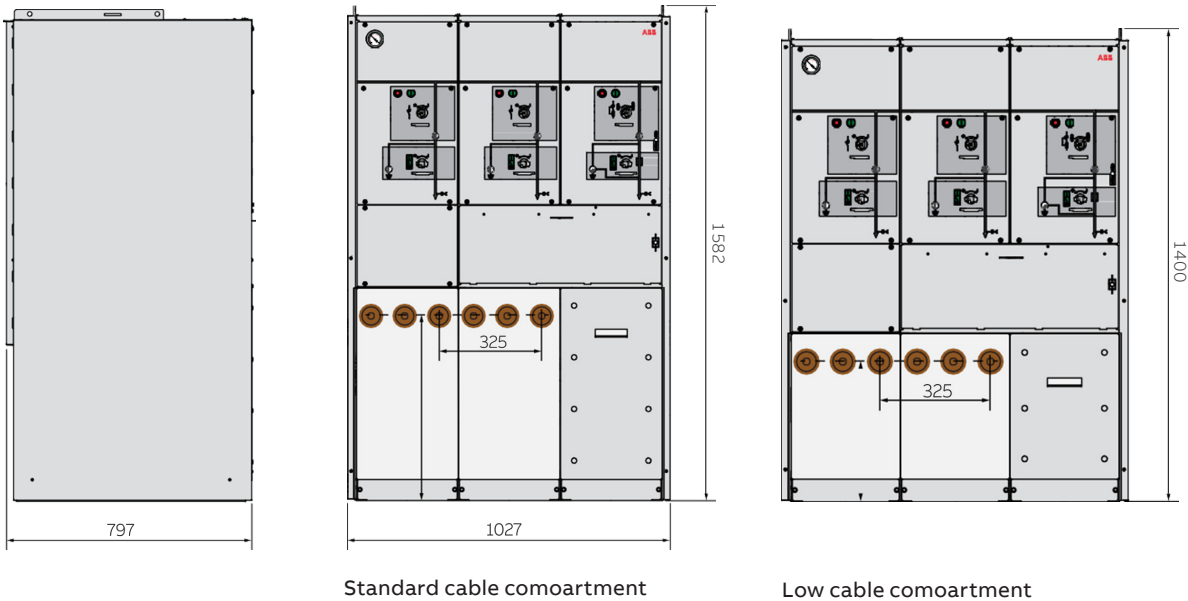


ABB Ltd.
Distribution Solutions Electrification
P.O. Box 8131
CH-8050 Zurich
Switzerland

solutions.abb.com/mediumvoltage

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB. Copyright© 2024 ABB
All rights reserved